

INSTRUCTIONS FOR TRIMLINE DOUBLE AWNINGS

- (3) LD Ell joints (Black arrows)
- (2) Awning Ell Joints
- (1) Awning Tee Joint
- (6) Thumb-screws
- (14) 6" White Ball Bungees
- (3) Poles (coded AWN) – snap-buttons at each end
- (2) Male pole sections – 61"
- (2) Female Pole Sections – 58 ¼" for **10' x 20'** awnings **OR**
- (1) Male Pole, (1) Female Pole Section, and (1) 57 ½" Pole for **10' x 15'** awnings
- (2) 10' Vinyl Awning Cloths for **10' x 20'** awnings **OR**
- (1) 10' and (1) 5' Awning Cloth for **10' x 15'** awnings
- (1) Double Awning Joiner Tarp
- (2) 9" Black Ball Bungee – for bundling poles



Awning Tee 603




LD Ell (Black Arrow)
LD 202

Awning Ell
602



1. When assembling the canopy, before attaching legs to canopy frame, slide LD Ell joints (black arrow down) onto upper leg sections of three legs. Loosely tighten thumbscrews, **then complete the canopy assembly.**

2. Push the LD Ell joints to the top of the canopy legs, flush with the corner joint at the top of the leg. Face them pointed outward and finger tighten the thumbscrew. Attach "AWN"-coded poles to Ell joints as shown.

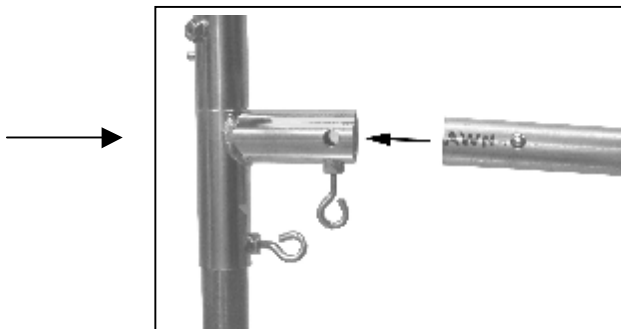


3. Use male and female pole section to create two 116 ½" poles. Attach an Awning Ell (no arrow, no thumbscrew) to one end of 116 ½" pole, and the awning tee to the other end. Slide this assembly onto protruding Awning poles. Attach an awning ell to the other 116 ½" pole, and attach to the 3rd awning pole, and the awning tee.

Note: Do not slide your LD Ells off the leg and onto the corner joint. The LD Ell should be positioned as pictured, no higher.

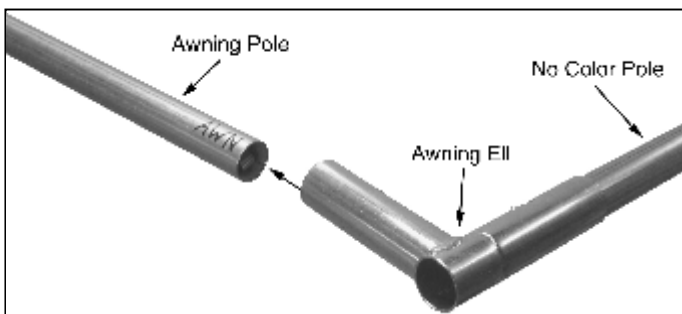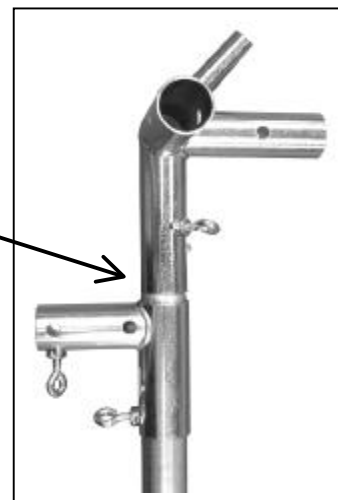

4. Zip both awning cloths to the canopy Roof and **secure Velcro straps to the upper horizontal pole of the canopy**. Thread the white ball bungees through the grommets in the awning cloths, and wrap around the awning poles, as shown in the diagram below, to secure the awning cloths to the outer Awning pole. Velcro the narrow awning joiner to the inner edges of both cloths

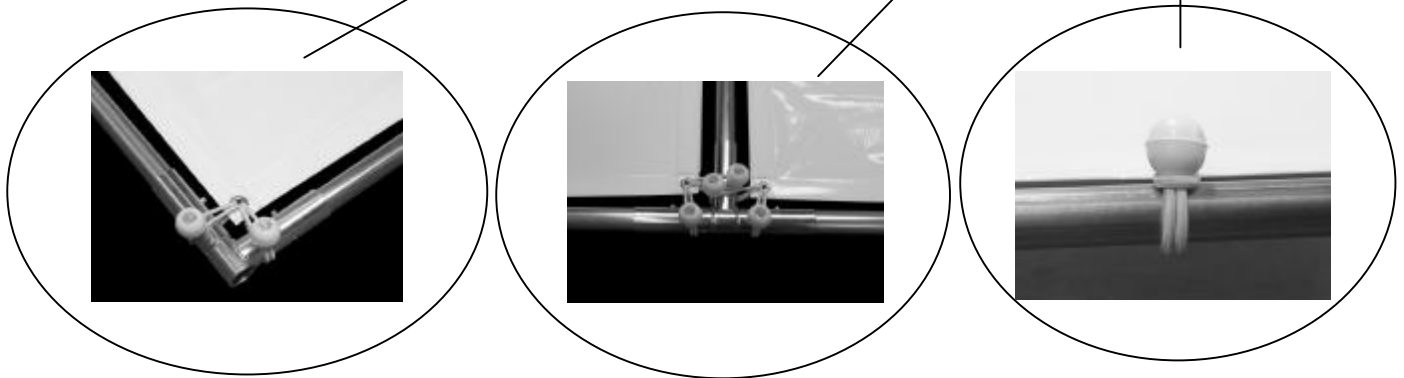

5. There is a second zipper on the Awning to which you can zip your regular sidewall. This permits closure of the canopy when the Awning is in place, although you will **NOT** be able to zip the walls to each other on the outsides of the legs. There are several possible arrangements when the awning is installed and the canopy walls need to be in place.
- Use your wind straps to hold the wall in place during business hours, and take the awning down overnight (recommended)– see step 6.
 - Zip the walls together to the **insides** of the canopy legs.
 - Purchase our **optional awning zipper strips**, which attach to your canopy sidewalls, and allow the walls to be zipped up with the awning in.
6. If closing the side-wall with the Awning in place is not as secure a closure as needed (as when you close up at night),
- unfasten the ball-bungees from the Awning front,
 - remove the long poles with joints still attached,
 - loosen the thumbscrews on the LD EII joints, and turn them to the inside of the canopy.

Walls may now be zipped along the legs. You may choose to ignore the second zipper on the Awning and simply remove the awning for the night.

7. If the awning does not permit enough height clearance, we suggest that you raise the entire canopy slightly (1 or 2 notches on the Leg Adjuster).